


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone 20"x10"x4", from which:

- a pine 20" diam., bears N.65 W., 21 lks. distant,
- a pine 40" diam., bears N.58 E., 154 lks. distant,
- a pine 10" diam., bears S.30 E., 45 lks. distant,
- a pine 16" diam., bears S.30 W., 21 lks. distant.

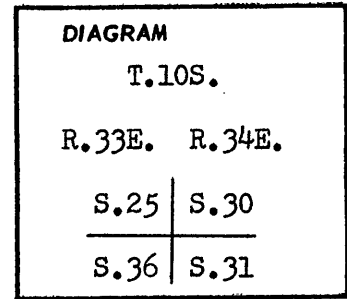

Description of corner evidence found:

Found a stone 18"x 10"x 4".

Found 2 original Bearing Trees, scribing partially visible:

- a stump of Bearing Tree in N.W. badly rotted, no scribes.
- a stump of Bearing Tree in S.W., badly rotted, no scribes.

Description of monument and accessories I established to perpetuate the original location of this corner

Set a 2½" x 30" iron post, with brass cap, set 24" in the ground.

Marked Bearing Trees as follows:


- a pine 10" diam., bears N.7½ W., 29 lks. distant, marked T.10 S., R.33 E., S.25, B.T.
- a pine 11" diam., bears S.63½ W., 97 lks. distant, marked T.10 S., R.33 E., S.36, B.T.

REGISTERED  
**OREGON**  
LAND SURVEYOR

*Duane I. Griffith*

JULY 10, 1964  
DUANE I. GRIFFITH  
644

Cap marked:

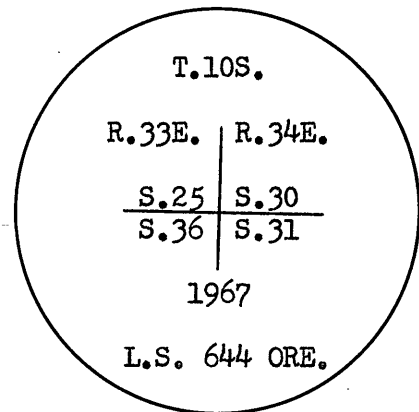

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the ..... day of....., 19....., at..... o'clock .....m., (signed)  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

RECEIVED AND  
**FILED**

JUL 19 1967  
*John Liveira*  
JOHN LIVEIRA, County Clerk