


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(Reference FSH 5681.65)

History of original corner establishment:

Twp. surveyed in 1881 by Robb and Graden. Corner not set.



Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner

Set a 2 1/2" x 30" iron post, 24 " in the ground with brass cap.

Marked Bearing Trees as follows:


- a pine 9" diam., bears S.41 E., 109 lks. distant, marked C S 1/16, S.31, B.T.
- a pine 16" diam., bears S.75 W., 23.5 lks. distant, marked C S 1/16, S.31, B.T.

REGISTERED  
OREGON  
LAND SURVEY

*Handwritten signature*

JULY 10, 1964  
DUANE I. GRIFFITH  
644

Cap marked:

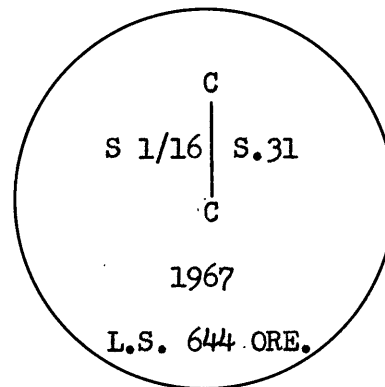

Office of ..... County of .....

State of ....., I hereby certify that the within instrument was filed in this office for record on the ..... day of ....., 19....., at..... o'clock .....m., (signed)

..... by .....

(COUNTY OFFICIAL) (DEPUTY)

*See Remon Sheet filed April 29, 1986*

RECEIVED AND FILED  
NOV 29 1967  
*Handwritten signature*  
JOHN LIVEIRA, County Clerk