

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


(Reference FSH 5681.65)

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone 16"x 12"x 6", from which:

- a pine 30" diam., bears N.10 W., 156 lks. distant,
- a pine 18" diam., bears N.5 E., 195 lks. distant,
- a pine 24" diam., bears S.45 E., 136 lks. distant,
- a pine 30" diam., bears S.37 W., 36 lks. distant.



Description of corner evidence found:

Found a stone 16"x 12"x 6".

Found 4 original Bearing Trees:

a pine snag in S.W. quadrant, marked, T.10 S., R.33 E., S.31, B.T.. scribes partially visible on other Bearing Trees.

Description of monument and accessories I established to perpetuate the original location of this corner


Marked new Bearing Trees:

a pine 11" diam., bears S.15 W., 86 lks. distant, marked, T10 S., R.34 E., S.31, B.T.

REGISTERED OREGON LAND SURVEYOR

[Handwritten Signature]

JULY 10, 1964
DUANE I. GRIFFITH
644

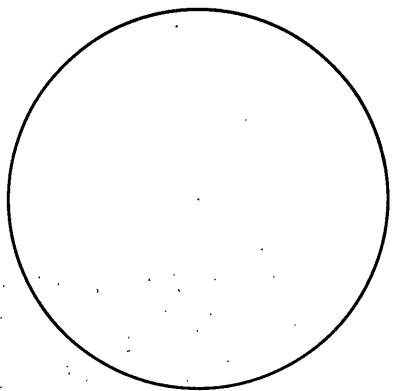

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the day of.....; 19....., at..... o'clockm., (signed)
 by
 (COUNTY OFFICIAL) (DEPUTY)

RECEIVED AND FILED
 NOV 29 1967
[Handwritten Signature]
 JOHN LIVEIRA, County Clerk
 By..... Deputy V-5