

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by Bamford Robb and Herman D. Gradon under joint GLO contract number 383 dated March 26, 1881 Surveyor General record states:

Set stone 14x10x6 ins in stone mound for 1/4 sec cor

Grant County survey number 64 by Duane I. Griffith calls finding the original stone in the mound and took bearing trees as follows:

A juniper 10 ins dia bears S41°W 100 lks dist marked 1/4 S32 BT  
A pine 13 ins dia bears S63°E 63 lks dist marked 1/4 S33 BT

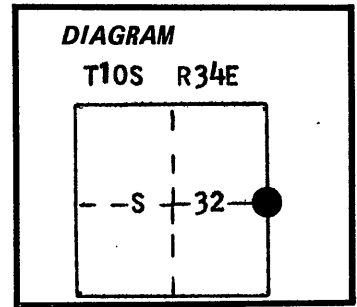

Description of corner evidence found:

Found stone of record size, well marked in mound of stone

Found both 1967 bearing trees as described below

See map of Grant County survey number 928

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone I set a 2 1/2'x30" aluminum pipe with aluminum cap marked as shown, 20 inches in the ground from which:

1967 bearing trees

A 15 inch diameter P.Pine bears S63°E 41.03 feet live and vigorous with blaze evident

A 13 inch diameter Juniper bears S41°W 65.50 feet live and vigorous with scribes visible


Raised mound of stone around monument

Buried original stone North and alongside of monument

Set steel fencepost approximately 5 feet North with 54-4 sign

Corner set March 28, 1986

Witness: Rick Robinson

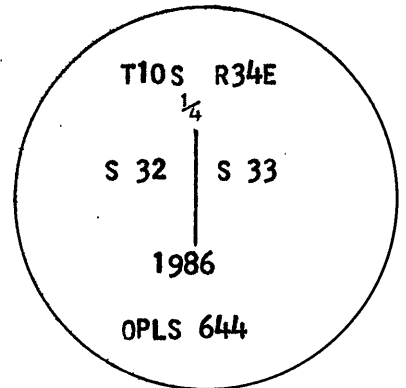

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

I used a steel tape and magnetic compass in the location of these accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the BT at the root crown.

Office of *Surveyor* County of *Grant*  
State of *Oregon* I hereby certify that the within instrument was filed in this office  
for record on the *27* day of *April*, 19 *86*  
*Robert D. Bayliff* by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

*SEE REMON FILED NOV. 29, 1967*