


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(Reference FSH 5681.65)

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone 14"x10"x6" in a mound of stone. No original Bearing Trees:

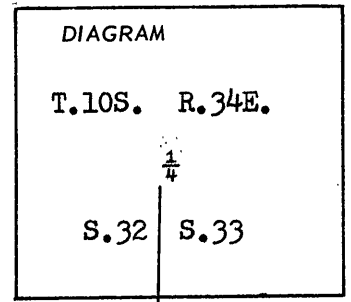

Description of corner evidence found:

Found a stone 14"x 10"x 6" in a mound of stone, marked, 1/4 on West face.

Description of monument and accessories I established to perpetuate the original location of this corner


Marked new Bearing Trees as follows:

a pine 13" diam., bears S.63 E., 63 lks. distant, marked, 1/4 S.33, B.T.  
a juniper 10" diam., bears S.41 W., 100 lks. distant, marked, 1/4 S.32, B.T.

REGISTERED  
OREGON  
LAND MONUMENTOR

*Handwritten signature*

JULY 10, 1964  
DUANE I. GRIFFITH  
644

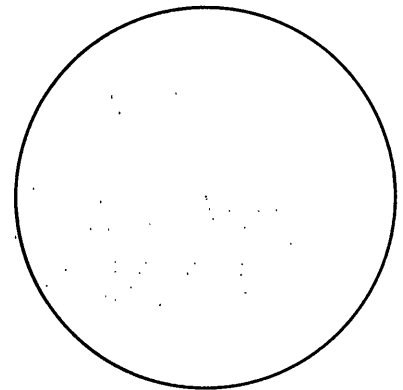

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of ..... 19....., at..... o'clock .....m., (signed)

(COUNTY OFFICIAL)

by

(DEPUTY)

See Remon sheet filed  
April 29, 1986,

RECEIVED AND

FILED

NOV 19 1967  
JOHN LIVEIRA, County Clerk