

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


(Reference FSH 5681.65)

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone 16"x12"x 8" in mound of stone from which:

a pine 8" diam., bears N.60 E., 58 lks. distant,  
a pine 24" diam., bears N.68 W., 66 lks. distant.

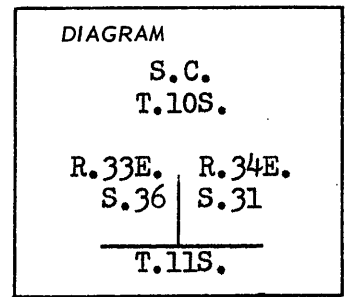

Description of corner evidence found:

Found a stone 16"x 12"x 8" in a mound of stone, with 6 grooves on the West, 6 grooves on the East, and an X on the top.

Found original Bearing Trees:

tree in N.E. quadrant is dying, scribes are partially visible,  
tree in N.W. quadrant is down and badly decayed, no scribes.

Description of monument and accessories I established to perpetuate the original location of this corner

Set a 2 1/2" x 30" iron post, 24" in the ground, with brass cap. Set original stone at base.

Marked new Bearing Trees as follows:


a pine 13" diam., bears N.58 E., 93.6 lks. distant, marked; T.10 S., R.34 E., S.31, SC, B.T.

a pine 14" diam., bears N.31 W., 151 lks. distant, marked; T.10S., R.33 E., S.36, SC, B.T.

**REGISTERED  
OREGON  
LAND SURVEYOR**

JULY 10, 1964  
DUANE I. GRIFFITH  
644

Cap marked:

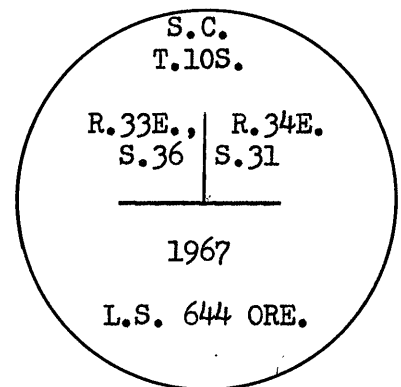

Office of ..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the ..... day of .....; 19....., at..... o'clock .....m., (signed)  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

**RECEIVED AND  
FILED**  
 NOV 29 1967  
 JOHN LIVEIRA, County Clerk  
 By ..... Deputy, Z-1