


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

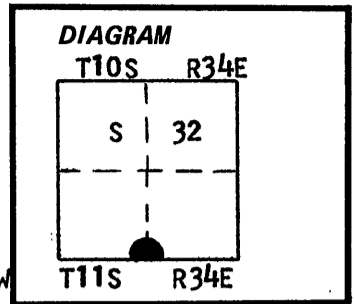

History of original corner establishment:

Corner originally set by Bamford Robb under GLO contract number 366 dated August 18, 1880. Surveyor General record states: Set granite stone 30x18x12 ins in mound of stone for 1/4 sec cor Corner was found by Bamford Robb and Herman D. Gradon on GLO contract number 383 dated March 26, 1881 Corner was found by Grand County survey number 665 by Frank J. Van Winkle in 1917 Corner was found on Homestead Entry survey number 252 by George W. Root in 1922

Original corner was not found in Grant County survey number 64 by Duane I. Griffith and a monument was set at proportionate position. Notes state:

Set iron post 30 ins long 2 1/2 ins dia 24 ins in the ground with brass cap marked: (shown below) From which: A pine 21" diam. bears N. 68E, 316 lks. dist., marked: SC 1/4, S32 BT Description of corner evidence found:

Found the monument I set in 1967. I removed this monument and reset it as described below. Also found bearing tree.


See map of Grant County survey number 928

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate position on the standard parallel I reset the monument removed from the 1967 position. The monument is a 2 1/2 x 30" galvanized iron pipe with brass cap marked as shown:

I set the monument 26 inches in the ground and raised a mound of stone around it. From which: The 1967 bearing tree now bears a 22 inch diam. P. Pine bears N. 67E, 196.6 ft., live w/visible scribe Set a steel fencepost approximately 5 feet East with 54-4 sign

Corner reset March 28, 1986
Witness: Rick Robinson

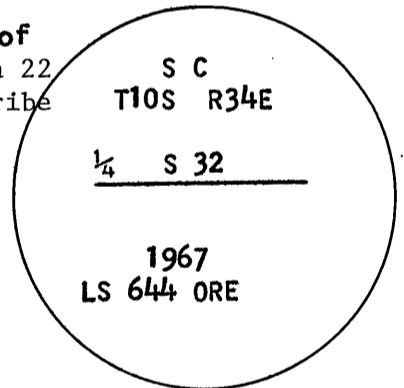

Office of... *Surveyor* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
for record on the... *1st* day of... *May* ... 19... *86* ...
Robert D. Griffith by ...
(COUNTY OFFICIAL) (DEPUTY)

SEE REMON FILED
NOV 29, 1967