


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(Reference FSH 5681.65)

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone 16"x 10"x 6" in a mound of stone. No BT.



Description of corner evidence found:

Found a stone 16"x 10"x 6" in a mound of stone. Marks faintly visible.

Description of monument and accessories I established to perpetuate the original location of this corner

Set a 2 1/2" x 30" iron post, 24" in the ground, with brass cap. Set original stone at base.

Marked new Bearing Trees as follows:

a pine 18" diam., bears N.36 E., 19 lks. distant, marked; SC, T.10 S., R.34 E. S.33, B.T.


a pine 10" diam., bears N.76 1/2 W., 96 lks. distant, marked; SC, T.10 S., R.34 E., S.32, B.T.

REGISTERED OREGON LAND SURVEYOR

Duane I. Griffith

JULY 10, 1964 DUANE I. GRIFFITH 644

Cap marked:

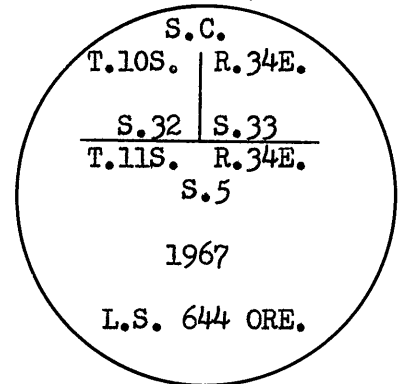

Office of..... County of..... State of....., I hereby certify that the within instrument was filed in this office for record on the day of.....; 19....., at..... o'clockm., (signed) (COUNTY OFFICIAL) by..... (DEPUTY)

RECEIVED AND FILED NOV 19 1967 JOHN LIVEIRA, County Clerk