


CORNER RESTORATION

CORNER ^{W $\frac{1}{4}$ corner} Sec. 16 TWP 12 S RANGE 35 E., W.M.

ORIGINAL SURVEY BY: BAMFORD ROBB

CONTRACT NUMBER: 383

CONTRACT DATE: March 26, 1881

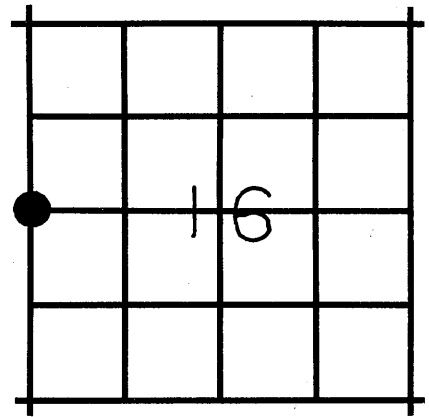

ORIGINAL DESCRIPTION:

North between Secs. 16 & 17:

40.00 set basalt stone 14x10x8 in mound of stone for $\frac{1}{4}$ sec. cor. from which:
A tamarack 10" in diam. bears N. 86° W., 1 lk. dist.

**RECEIVED AND
FILED**

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
F. Jackson
K. Leckenby

REGISTERED
PROFESSIONAL
LAND SURVEYOR

JUL 2 1979
John Liveira
JOHN LIVEIRA, County Clerk
By.....Deputy

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

May 30, 1979

Grant County Surveyor.

EVIDENCE FOUND:

Found the original corner stone a 13"x8"x6" basalt stone marked $\frac{1}{4}$ on N. face and set in a mound of stone.

See Map of Survey No. 570.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

I accept the position of the corner stone.

MONUMENT MARKED

At the corner point: Set 1 $\frac{1}{2}$ "x30" iron pipe 24" in the ground with brass cap marked as shown, from which I scribe
NEW BEARING TREES:

A 14" tamarack bears S. 75° E., 31.0 ft. mkd. T12SR35E $\frac{1}{4}$ S16CSBT
A 10" tamarack bears S. 41° W., 24.7 ft. mkd. T12SR35E $\frac{1}{4}$ S17CSBT

I buried the original corner stone South and alongside the iron pipe and surrounded the pipe with a mound of stone. I used a compass with 20° East variation and steel tape, measuring to the center of the bearing trees.

