


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

NER TO SECTIONS 23, 24, 25, & 26, T14S, R27E, WM.

History of original corner establishment: SET BY S.W. LACKLAND

UNDER HIS CONTRACT NO. 415 DATED AUGUST 19, 1881
HIS NOTES STATE: SET BASALT STONE 15x7x7 INS. 10 IN. IN
GROUND FOR COR. TO SECS 23, 24, 25 + 26, MARKED WITH 2
NOTCHES ON S. + 1 NOTCH ON E EDGE, FROM WHICH:

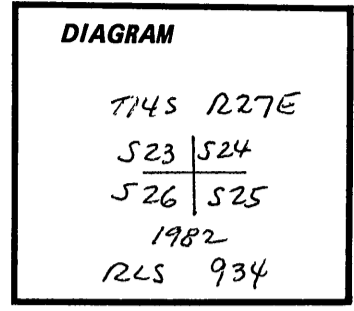

- A PINE 30 IN DIAM. BEARS S 78° W 45 LKS. DIST. MARKED "T14S R27E SEC. 26 BT"
- A PINE 12 IN DIAM BEARS N 23° E 51 LKS DIST. MARKED "T14S R27E SEC 24 BT"
- RAISED MOUND OF STONE 2 1/2 FT. HIGH 4 FT. BASE ALONGSIDE

Description of corner evidence found:

FOUND BASALT STONE 12x7x7" SETTING FIRMLY IN STONE MOUND, WITH 2 NOTCHES ON S. + 1 NOTCH ON E. EDGES, FROM WHICH:

- OBT, A 22" D.B.H. DOUBLE P. PINE, BURNT FACE, BEARS N 17° E 35.4 FT. GOOD CONDITION.
- OBT, A 30" D.B.H. P. PINE SNAG, 11 FT. TALL, SCRIBES "S2T, R22" VISIBLE, BODY LEANING, BEARS S 73° W 30.0 FT.

Description of monument and accessories I established to perpetuate the original location of this corner:

IN PLACE OF FOUND STONE I SET A 3"x30" AL. PIPE WITH A 3 1/2" AL. CAP STAMPED AS SHOWN ABOVE, 20" IN GROUND, BURIED STONE MON. ALONGSIDE, AND BUILT A MOUND OF STONE AROUND IT. MY NEW BT'S ARE AS FOLLOWS:

- A 15" D.B.H. D. FIR, SCRIBED "T14S R27E S26 BT" BEARS S 7 1/2° W, 11.3 FT.
- A 12" D.B.H. P. PINE, SCRIBED "T14S R27E S25 BT" BEARS S 55° E, 22.4 FT.
- A 9" D.B.H. P. PINE, SCRIBED "T14S R27E S23 BT" BEARS N 29° W, 48.9 FT.

DATE SET: 10-27-82

WITNESS: DALE WRIGHT, LUIS MELIND

REGISTERED PROFESSIONAL LAND SURVEYOR

Victor M. Melind

OREGON
JULY 17, 1970
VICTOR M. MELIND
934

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 16 day of Dec, 1982
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)