


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

CORNER TO SECS. 33 AND 34, T14S, R27E, AND TO SECS. 3 AND 4, T15S, R27E, W.M.

History of original corner establishment: SET BY S.W. LACKLAND UNDER HIS CONTRACT NO. 384, DATED MARCH 29, 1881.

HIS NOTES STATE: SET BASALT STONE 18x10x6 IN MOUND OF STONE FOR COR. TO SECS. 3, 4, 33 + 34

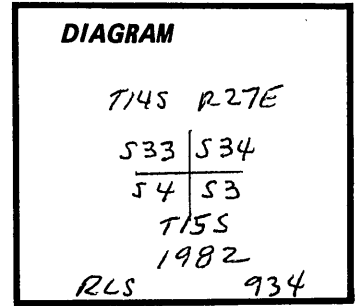

Description of corner evidence found:

FOUND STONE (BASALT) 19x10x6" IN RING OF STONES, WITH 3 NOTCHES ON E. AND 3 NOTCHES ON W. SIDES, AND "+" ON TOP.

Description of monument and accessories established to perpetuate the original location of this corner:

IN PLACE OF CORNER STONE I SET A 3"x30" AL. PIPE WITH A 3 1/2" AL. CAP STAMPED AS SHOWN ABOVE, 20" IN GROUND, BURIED COR. STONE ALONGSIDE, AND BUILT A MOUND OF STONE AROUND IT. MY NEW BEARING OBJECTS ARE AS FOLLOWS:

- A BASALT BOULDER, 43x35x26" HIGH, CHISELED "+BO" ON S.E. COR., 8" ABOVE GROUND, BEARS N57°W 106.3 FT.
- A BASALT BOULDER, 33x28x10" HIGH, CHISELED "+BO" ON TOP, BEARS S58°W, 153.1 FT.
- A BASALT BOULDER, 19x23x9" HIGH, CHISELED "+BO" ON TOP, BEARS S9 1/2°E, 139.5 FT.
- A BASALT BOULDER, 30x36x12" HIGH, CHISELED "+BO" ON TOP, BEARS N15 1/2°E, 142.4 FT.

DATE SET: 10-14-82

WITNESS: DALE WRIGHT, LUIS McLIND

REGISTERED PROFESSIONAL LAND SURVEYOR

Victor M. McLind

OREGON
JULY 17, 1970
VICTOR M. McLIND
934

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *16* day of..... *Dec* 19..... *82*
Robert D. Sargent by
(COUNTY OFFICIAL) (DEPUTY)