


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established.

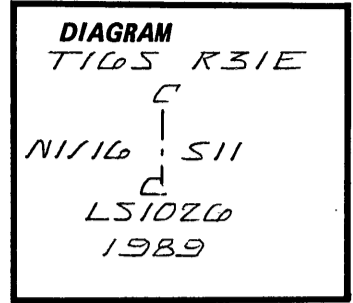

F-19
F.B. 7 P. 53,54

Description of corner evidence found:

None. Corner not previously established.

Description of monument and accessories I established to perpetuate the original location of this corner:

At position as determined by survey set a 2-1/2"O.D.x30" long aluminum pipe 24" in ground with a 2-1/2" diameter aluminum cap marked as shown: Raised a 3 ft. diameter stone mound to cap.

Marked bearing trees:

A 20" Douglas Fir bears North 78° East, 63.4 ft., scribed "CN1/16S11BT"; a 4" Ponderosa Pine bears South 14° East, 38.7 ft., scribed "CN1/16S11BT". Painted a 6" red band and face blazes red. Nailed signs 54-9 and 54-3 to BT'S. Nailed a brass washer stamped "LS 1026" to face blazes of BT'S. Set a steel fence post 5 ft. East of cap with signs 54-9 and 54-2. Bearings are by staff compass and declination is 19-1/2° East.

I hereby certify that the above corner monument was re-established as herein described on October 20, 1989.

Witnesses: Wes G. Heigh
Paul D. Woodworth

See C.S. #1124

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David B. Armstrong

12/22/89 OREGON
AUGUST 22, 1975
DAVID B. ARMSTRONG
1026

Office of Surveyor County of Giant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 13 day of Feb, 1990
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)