


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Henry Cooke under Contract No. 488, dated 1883  
Set a stone 18x16x12 marked  $\frac{1}{4}$  on N face  
12" Pine N  $53^\circ$  W 71 lks  
18" Pine S  $62^\circ$  W 150 lks

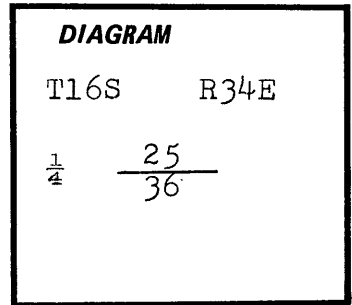

Description of corner evidence found:

Found a stone 18x16x12 with 25, 36 chisled on side  
Down rotted stub at N  $53^\circ$  W 71 lks.  
22" Pine snag down S  $62^\circ$  W 150 lks, scribe  $\frac{1}{4}$  S BT visible

Description of monument and accessories I established to perpetuate the original location of this corner:

I replaced the stone with a 2"x30" Alum. pipe with  $3\frac{1}{2}$ " cap set in stone mound with original stone buried along west side of pipe and stamped:

12" Pine bears S  $62^\circ$  W 87.8', scribed  $\frac{1}{4}$  S 36 BT  
No other BT's available

The BT has a brass disc (LS 559), BT tag, sign 54-4



I certify the corner was restored as described Sept. 8, 1981

Witness: Sherm Zemke  
Sherm Zemke

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Elbert Driver

OREGON  
JANUARY 2, 1962  
ELBERT DRIVER  
559

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 21 day of Oct, 1981  
Robert H. Baggett by .....  
(COUNTY OFFICIAL) (DEPUTY)