


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Henry Cooke under Contract No. 488, dated 1883  
Set a stone 24x20x12 marked  $\frac{1}{4}$  on W face  
40" Pine S 60° W 20 lks.  
12" Pine S 80° E 50 lks.

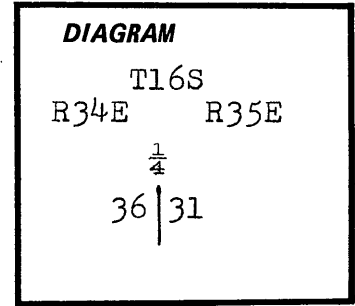

Description of corner evidence found:

Found a stone 24x20x12 with  $\frac{1}{4}$  chisled on side.  
36" Pine S 60° W 20 lks, scribe  $\frac{1}{4}$  S BT visible.  
14" Pine S 80° E 50 lks, scribe  $\frac{1}{4}$  S visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

I replaced the stone with a 2"x30" Alum. pipe with 3 $\frac{1}{2}$ " cap set in a large stone mound with the original stone alongside of pipe and stamped:  
6" Pine bears N 39° W 14.9', scribed  $\frac{1}{4}$  S36 BT.  
Each BT has a brass disc (LS 559), BT tag, sign 54-4



I certify the corner was restored as described Sept. 8, 1981.

Witness: Sherm Zemke  
Sherm Zemke

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Elbert Driver

OREGON  
JANUARY 2, 1962  
ELBERT DRIVER  
559

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 21 day of Oct, 1981  
Courtney Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)