


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Henry Cooke under Contract No. 488, dated 1883  
Set a stone 18x16x10 marked with 6 notches  
16" Pine N 34° E 76 lks.  
30" Pine S 10° E 145 lks.  
44" Pine S 32° W 90 lks.  
38" Pine N 58° W 110 lks.

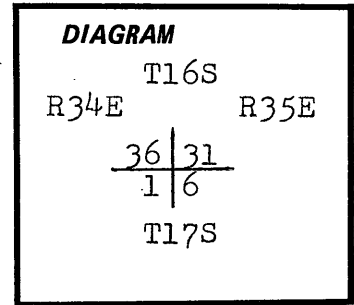

Description of corner evidence found:

Found a stone 18x16x10 with 6 notches.  
36" Pine N 34° E 49.8', face healed over, did not open.  
34" Pine S 10° E 95.7', scribe T35S6 visible.  
42" Pine S 32° W 59.4', portion of scribe T1S visible.  
24" Pine snag N 58° W 72.6', scribe T16S R34E S36 BT visible.

Description of monument and accessories established to perpetuate the original location of this corner:

I replaced the stone with a 2"x30" Alum. pipe with 3½" cap set in a large stone mound with the original stone along East side of pipe and stamped:  
6" Pine bears N 45° W 30.4', scribed T16S R34E S36 BT  
Each BT has a brass disc (LS 559), BT tag, sign 54-4



I certify the corner was restored as described Sept. 8, 1981.

Witness: Sherm Zemke  
Sherm Zemke

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Elbert Driver*

OREGON  
JANUARY 2, 1962  
ELBERT DRIVER  
559

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 21 day of Oct, 1981.  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)