


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

This corner was originally established by Aaron F. York under G.L.O. contract number 309 dated November 18, 1878. He set a stone 13"x 11"x 5" and raised a stone mound at the corner.

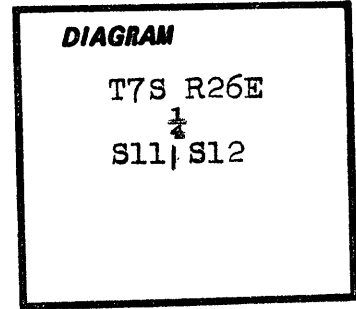

**Description of corner evidence found:**

None.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At proportionate distance I set a 2 $\frac{1}{2}$ "x 30" alum. pipe with a 3" alum. cap containing a magnet and marked:

I built a stone mound around the monument.

From the corner:

- A Juniper, 7" dia., S78 3/4°W, 38.7 ft.  
marked:  $\frac{1}{4}$  S11 BT
- A Juniper, 12" dia., S10 $\frac{1}{4}$ °E, 84.6 ft.  
marked:  $\frac{1}{4}$  S12 BT

T7S R26E  
     $\frac{1}{4}$   
S11|S12  
PLS 1832  
1985

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with an "Attention" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 25°E.

July 27, 1985

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Fayette S. Munro*  
OREGON  
JULY 13, 1979  
FAYETTE S. MUNRO  
1832

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 23 day of Sept, 1985  
Robert H. Light by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)