


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Section 36, T.7S., R.26E., W.M.

Z-21

History of original corner establishment:

Alonzo Gesner, under G.L.O. contract number 266,
dated June 20, 1877, set a stone 16"X 15"X 7" and
raised a stone mound at the corner.

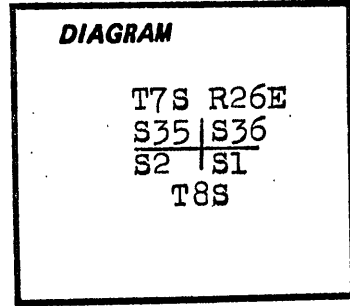

Description of corner evidence found:

I found a stone 18"X 15"X 7" marked: $\frac{8}{26}$; in a stone mound.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the original corner point I set a 2 $\frac{1}{2}$ "X 30" alum. pipe with a 3" alum. cap containing a magnet and marked:

I buried the original stone alongside and built a stone mound around the monument.

From the corner:

A Juniper, 24" dia., N10 $\frac{1}{2}$ °W, 50.2 ft.; marked:
T7S R26E S35 BT

A Ponderosa Pine, 18" dia., N15°E, 103.1 ft.; marked: T7S R26E S36 BT

A Juniper, 19" dia., S50 $\frac{1}{4}$ °E, 56.0 ft.; marked: T8S R26E S1 BT

A Ponderosa Pine, 15" dia., S55°W, 67.6 ft.; marked: T8S R26E S2 BT

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with an "Attention" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 16 $\frac{1}{2}$ °E.

October 28, 1985

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832

Office of..... *Survey* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *10* day of..... *Jan* 19..... *86*
..... *Robert D. Baggett* by
(COUNTY OFFICIAL) (DEPUTY)