


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not prev. established

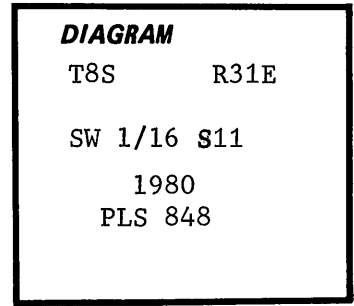

Description of corner evidence found:

N.A.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 12" in ground & raised a mound of stone around the pipe. Stamped brass cap as shown in diagram.

From which:

A juniper 11" dia bears N 49 W 59.5 ft. scribed SW 1/16 S11 BT

A pine 13" dia bears S 19 E 21.4 ft. " " " " "

Nailed brass washers stamped PLS 848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry. signs 5'S & 5'W from corner.

Bearing-Solar Grid.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 12, 1968  
DOUGLAS M. FERGUSON  
848

Witnesses to above corner.

- D. Gaylord
- D. Herburger
- L. Wyllie

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 12 day of Jan, 1981.  
Robert D. Bayett by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)