


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index No. P-21

History of original corner establishment:

This corner was originally set by F.W. Campbell under contract No. 380 dated March 19, 1881. The notes state that a marked basalt stone 16"x8"x6" was set and pits were dug

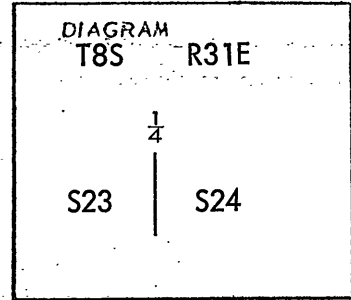

No record of subsequent remonumentation found in County Records .

Description of corner evidence found:

After a diligent search the original stone was not recovered. Corner was re-established by single proportion measure.

Description of monument and accessories established to perpetuate the original location of this corner

At the corner position a 2 inch by 30 inch iron pipe, with brass cap marked as shown, was set 6 inches in the ground and surrounded with a mound of stones to the cap.

Set a steel fence post North of the corner and attached sign 54-4.

Established 2 new BT's:

A 10" Pine bears S84 1/2° E 42.9 feet scribed 1/4 S 24 BT

A 11" Pine bears N80° W 43.6 feet scribed 1/4 S 23 BT

New BT's have a lower blaze scribed BT with brass washer stamped PLS 1106 nailed flush.

Attached signs 54-3 and 54-4 to all BT's and painted red ring around the trees above the upper blaze

Used steel tape and magnetic compass with 19 1/2° east declination. Measured to center of Bts.

See map of survey


This corner set November 7, 1979

- Witnesses:
- D. Kaufman, PLS
 - B. English
 - D. Bartleson
 - C. Kelly

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

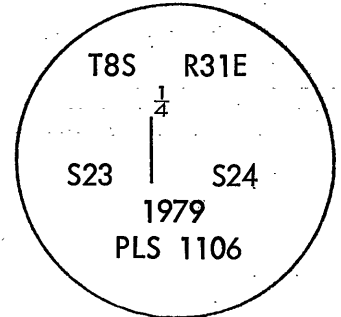

Office of County Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 9 day of Jan 1980
Robert H. Bergitt by _____
(COUNTY OFFICIAL) (DEPUTY)