CORNER RESTORATION

NE cor. SEC. 30
CORNER _____ TWP 8S, RANGE 31 E., W.M.

ORIGINAL SURVEY BY: F.W. Campbell

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

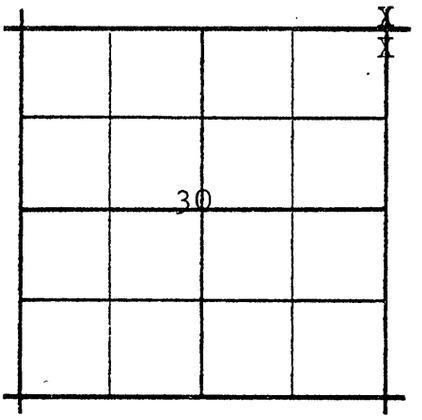

ORIGINAL DESCRIPTION:

Set a basalt stone 18x8x8 and raised mound of stone for cor. to secs. 19,20,29, & 30.

RESTORATION BY, STAMP AND DATE:

Bagett & Griffith Surveying
John Day, Oregon

April 10, 1970

REGISTERED
OREGON
LAND SURVEYOR
JULY 10, 1964
DUANE I. GRIFFITH
644

EVIDENCE FOUND:

Unmarked stone 16"x8"x7" in mound of stone, the position of which is in harmony with other found corners of the township.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

Set 1"x30" iron pipe 10 ins. in the ground, with brass cap mkd. as shown.

MONUMENT MARKED

No bearing trees available.
Raised a mound of stone 4 ft. base to top of pipe.

Set wooden fence post near cor. with mkd. metal tag.

GRANT COUNTY SURVEYOR
T8S R31E
S19 | S20
S30 | S29
1970
LS 644

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820

R-5