


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was originally set by F.W. Campbell under contract No. 380 dated March 19, 1881. The notes state that a marked basalt stone 12x6x4 was set and pits were dug.

Index No. T-21

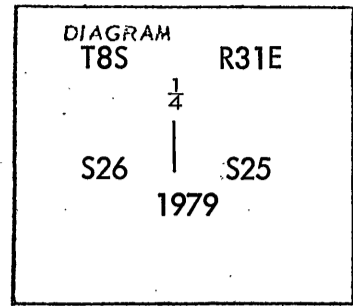

No record of subsequent remonumentation found in County Records .

Description of corner evidence found:

Found a marked basalt stone 11x8x5" With "1/4" chiseled on its face in a small mound of stone. An East-West fence bears South 0.3 feet.

Description of monument and accessories I established to perpetuate the original location of this corner

At the corner position a 2 inch by 30 inch iron pipe, with brass cap marked as shown, was set 12 inches in the ground and surrounded with a mound of stones to the cap.

Set a steel fence post East of the corner and attached sign 54-4.

Established 2 new BT's:

A 10" Juniper with a double stump bears S39°W 276.4 feet scribed 1/4 S 26 BT

A 9" Juniper bears N12°E 184.2 feet scribed 1/4 S25 BT

New BT's have a lower blaze scribed BT with brass washer stamped PLS 1106 nailed flush.

Attached signs 54-3 and 54-4 to all BT's and painted red ring around the trees above the upper blaze

Used steel tape and magnetic compass with 19 1/2° east declination. Measured to center of Bts.


See map of survey

This corner set October 25, 1979

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

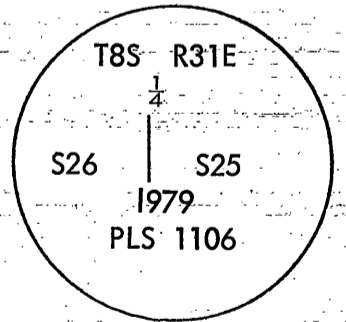

Witnesses: D. Kaufman, PLS
D. Bartleson
C. Kelly

Office of County Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 9 day of Jan 1980
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)