


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was established in 1884 by Herman D. Gradon, under General Land Office contract #499, Surveyor General's Records state:

Set a post 3 feet long 3 inch sq. 24" in the ground for the 1/4 corner.

Fir 5" dia. bears N75°E 21 lks.

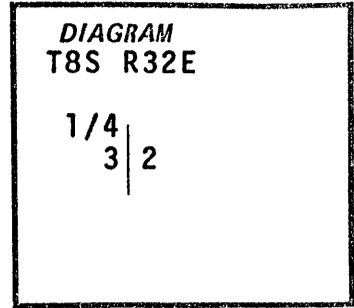


Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner: 3/6/81

I set a 2"x30" flanged G.I. pipe with a 2-1/2" brass cap exposed 6" from which I mark the following trees as required, taking measurements to the center of the tree at the lower blaze in which I place a brass washer LS 1679:

D. Fir 9" dia. bears S45°06'E 61.0 feet
P. Pine dia. bears S26°52'W 40.1 feet

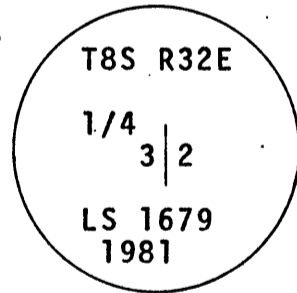

Office of.....**Surveyor**..... County of.....**Grant**.....

State of.....**Oregon**....., I hereby certify that the within instrument was filed in this office

for record on the 28 day of Oct, 1981

Robert D. Sagant by

(COUNTY OFFICIAL)

(DEPUTY)