


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None

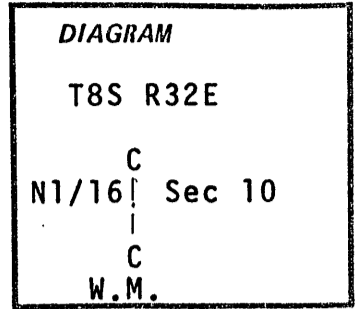

Description of corner evidence found:

None


Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2"x30" flanged G.I. pipe with 2-1/2" brass cap exposed 8" in a mound of stone.

I mark the following trees with a washer (LS 1679) in the lower blaze:

- D. Fir 13" dia. bears N24°43'W 16.3 feet.
- W. Fir 9" dia. bears S23°33'W 33.1 feet.

Monument set 4/29/81.



Office of.....**Surveyor**..... County of.....**Grant**.....
 State of.....**Oregon**....., I hereby certify that the within instrument was filed in this office
 for record on the...**28** day of...**Sept**....., 19...**81**.....
 ..*Robert D. Sargent*..... by ..*[Signature]*.....
 (COUNTY OFFICIAL) (DEPUTY)