

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

This corner was established in 1884 by Herman D. Fradon under contract No. 499.

Surveyor General's records state:

Set a stone 17 x 12 x 8 for corner from which:

- Pine 12" dia. bears North 32° East, 15.18 feet
- Pine 12" dia. bears South 40° East, 11.22 feet
- Pine 10" dia. bears South 58° West, 6.60 feet
- Pine 10" dia. bears North 25° West, 9.90 feet

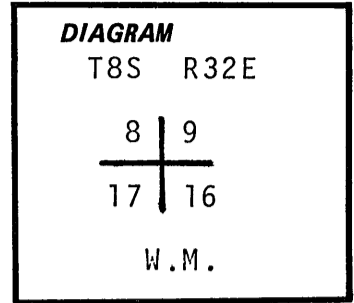


Description of corner evidence found:

Found the original stone firmly set in a mound of stone with 4 notches on the South and East faces measuring 17 x 12 x 7, from which:

- P. Pine 20" dia. with healed blazes bears North 37-1/2° East, 15.0 to center
- P. Pine sawed stump 19" dia. bears South 37° East, 11.8 feet to face
- P. Pine 21" dia. with healed blazes bears South 58° West, 7.4 feet to center

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2" x 30" flanged galvanized iron pipe with a 2-1/2" brass cap mkd: exposed 14" in a mound of stone. I place the original stone alongside as a memorial and mark the following trees, taking measurements to the center of tree at the lower blaze in which I place a brass washer mkd LS 1679:

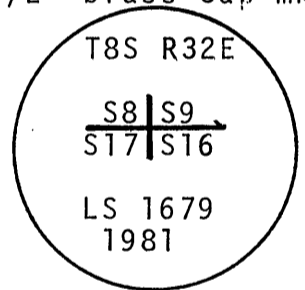

- P. Pine 15" dia. bears South 86-1/2° East, 34.1 feet
- Juniper 6" dia. bears North 40° West, 131.3 feet

Mag. Var. = 20° East

Witness: Bob Malotte

I hereby certify the above corner monument was reestablished as herein described on January 14, 1981.



Office of..... Surveyor..... County of..... Grant.....  
State of..... Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the...9... day of... Feb... , 1981  
..... Robert D. Baxst..... by.....  
(COUNTY OFFICIAL) (DEPUTY)