


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index N-3

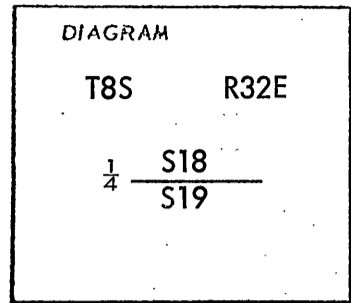

History of original corner establishment:

This corner was originally established by Herman D. Gradon under Contract No. 499 dated March 11, 1884.
 The notes state that at the corner position a post 3 feet long, 3 inches square was set 24" in the ground from which:
 A 12" Fir bears N50°W 24lks (15.8 ft) marked $\frac{1}{4}$ SBT
 A 7" Fir bears S60°E 11lks (7.3 ft) marked $\frac{1}{4}$ SBT

No record of subsequent remonumentation found in County Records .
Description of corner evidence found:

The original post was not recovered. The corner was re-established by survey
 The area has been logged and no evidence of the original BT's was found.

Description of monument and accessories established to perpetuate the original location of this corner

At the corner position a 2 inch by 30 inch iron pipe, with brass cap marked as shown, was set 24 inches in the ground and surrounded with a mound of stones to the cap .

Set a steel fence post East of the corner & attached sign 54-4
 Established 2 new BT's:

- A 8" Fir bears S78 $\frac{1}{2}$ °W 13.0 feet scribed $\frac{1}{4}$ S19BT
- A 9 $\frac{1}{2}$ " Fir bears N17 $\frac{1}{2}$ °E 15.1 feet scribed $\frac{1}{4}$ S 18 BT


New BT's have a lower blaze scribed BT with brass washer stamped PLS 1106 nailed flush.
 Attached signs 54-3 and 54-4 to all BT's and painted red ring around the trees above the upper blaze.

Used steel tape and magnetic compass with 19 $\frac{1}{2}$ ° east declination . Measured to center of Bts.
 See map of survey

This corner set November 6, 1979

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

William R. Wells
 OREGON
 JULY 22, 1977
 WILLIAM R. WELLS
 1106

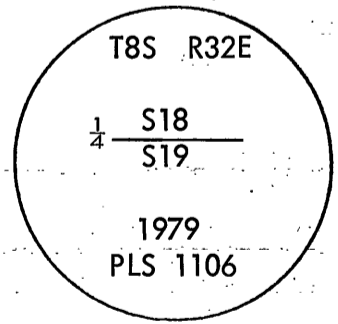

Witnesses: D. Kaufman, PLS
 B. English

Office of County Surveyor County of Grant
 State of Oreagon
 I hereby certify that the within instrument was filed in this office
 for record on the 9 day of Jun 1980
Robert D. Burt by _____
 (COUNTY OFFICIAL) (DEPUTY)