


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was originally set by Herman D. Gradon under Contract No. 499 dated March 11, 1884. The notes state that a marked basalt stone 18x12x6" was set 12" in the ground from which:
 A 8" Fir bears N45°W 43 lks (28.4 feet) marked 1/4 S BT
 A 18" Pine bears S18°W 24 lks (15.8 feet) marked 1/4 S BT

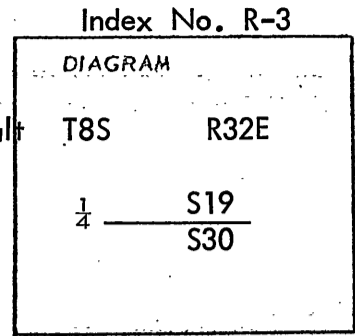

No record of subsequent remonumentation found in County Records .

Description of corner evidence found:

Found a basalt stone 12x14x6" with 1/4 chiseled on it set 8" in the ground from which:
 A 26 1/2" Red Fir bears N49°W 28.6 feet with a healed blaze .

Description of monument and accessories established to perpetuate the original location of this corner

At the corner position a 2 inch by 30 inch iron pipe, with brass cap marked as shown, was set 27 inches in the ground and surrounded with a mound of stones to the cap .

Set a steel fence post South of corner and attached sign 54-2 and set a steel fence post East of the corner and attached sign 54-2 and 54-4

Established 2 new BT's:

A 5 1/2" Red Fir bears N13 1/2°E 5.3 feet scribed 1/4 S 19 BT

A 8" Red Fir bears S72°E 20.1 feet scribed 1/4 S 30 BT

New BT's have a lower blaze scribed BT with brass washer stamped PLS 1106 nailed flush.

Attached signs 54-3 and 54-4 to all BT's and painted a red ring around the trees above the upper blaze .

Used steel tape and magnetic compass with 19 1/2° east declination . Measured to center of Bts.

See map of survey


This corner set September 26, 1979

Witnesses: D. Kaufman, PLS
 G. Flowers, LSIT
 B. English

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

William R. Wells

OREGON
 JULY 22, 1977
 WILLIAM R. WELLS
 - 1106

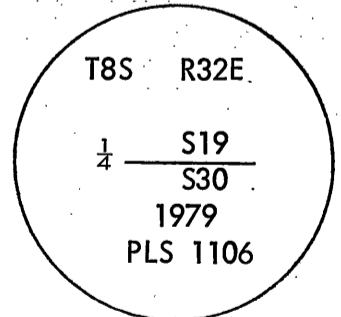

Office of County Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 9 day of Jan 1980
Robert D. Bugh by _____
 (COUNTY OFFICIAL) (DEPUTY)