

CORNER


RESTORATION

CORNER: CW1/16 Sec 30 TWP. 8S. RANGE 32E.

ORIGINAL SURVEY BY: Corner

CONTRACT NUMBER: not previously

CONTRACT DATE: established

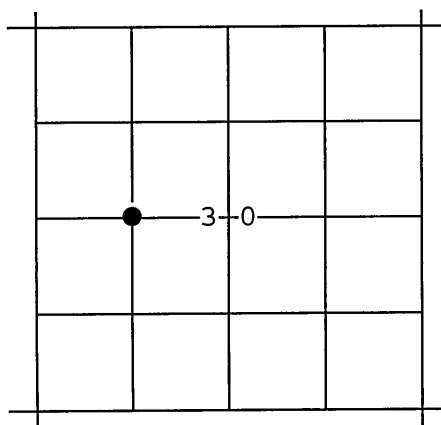

ORIGINAL DESCRIPTION: Corner not previously established.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
G.J. Russell

RECEIVED AND
FILED

Oct 10, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *G.J. Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/95

Sept. 18, 1995

EVIDENCE FOUND: None

See Record Map of Survey No. 1379.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 5/8"x30" iron pin,
30" in the ground, with attached Bagett-Griffith & Blackman
Alum. cap marked as shown.

From which: I SCRIBE NEW BEARING TREES:

A Ponderosa Pine 5" diam., bears S53°W, 36.9 ft.
marked X BT.

A Ponderosa Pine 11" diam., bears N52°W, 71.9 ft.
marked CW 1/16 S30 BT.

MONUMENT MARKED

BGB SURVEY
MARKER

W1/16
C—C
S30

1995
OPLS 598

Raised a mound of stone 2 ft. base to top of cap. Used mag. compass with
20°E var. and a steel tape, measuring to a 50d nail driven in the
sidecenter at the root crown of the BT's. Attached BT tags to BT's.