

# CORNER


# RESTORATION

CORNER: W1/16 Sec 30 TWP. 8S. RANGE 32E.

ORIGINAL SURVEY BY: Corner

CONTRACT NUMBER: not previously

CONTRACT DATE: established

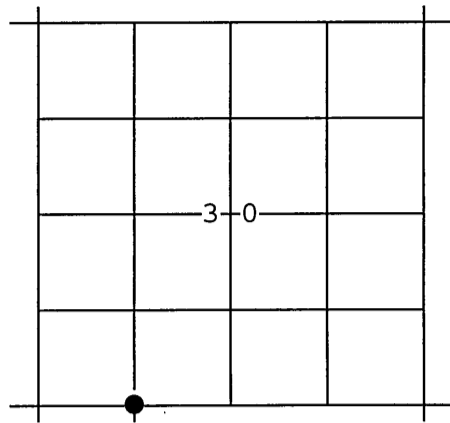

ORIGINAL DESCRIPTION: Corner not previously established.

**RESTORATION BY, STAMP AND DATE:**

R.D. Bagett  
S.D. Follweiler  
G.J. Russell

RECEIVED AND  
FILED

*Oct 10, 1995*  
OFFICE OF COUNTY SURVEYOR

*Robert D. Bagett*

ATTEST: *[Signature]*

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Bagett*

OREGON  
JULY 12, 1963  
ROBERT D. BAGETT  
598

Renewal Date 12/31/95

Sept. 18, 1995

EVIDENCE FOUND: None

See Record Map of Survey No. 1379.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 5/8"x30" iron pin,  
30" in the ground, with attached Bagett-Griffith & Blackman  
Alum. cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Ponderosa Pine 16" diam., bears S37°W, 18.3 ft.  
marked W1/16 S31 BT.

A Western Larch 10" diam., bears N81°W, 10.8 ft.  
marked W1/16 S30 BT.

**MONUMENT MARKED**

BGB SURVEY  
MARKER

S30  
W1/16 —————  
S31

1995  
OPLS 598

Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail  
driven in the sidecenter at the root crown of the BT's. Attached BT tags  
to BT's.