


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was originally set by Herman D. Gradon under Contract No. 499 dated March 11, 1884. The notes state that a marked post 3 feet long and 3 inches square was set 24" in the ground from which:

- A 6" Pine bears N88°W 20 lks (13.2 ft) marked $\frac{1}{4}$ BT
- A 13" Fir bears S3°E 12 lks (7.9 ft) marked $\frac{1}{4}$ SBT

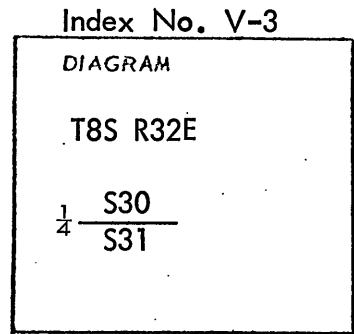

No record of subsequent remonumentation found in County Records .

Description of corner evidence found:

After a diligent search no evidence of the original corner or the original BT's was found.

Description of monument and accessories established to perpetuate the original location of this corner

At the corner position a 2 inch by 30 inch iron pipe, with brass cap marked as shown, was set 17 inches in the ground and surrounded with a mound of stones to the cap.

Set steel fence posts North and West of corner and attached signs 54-2 and 54-4
Established 2 new BT's:

- A 9" Fir bears N35 $\frac{1}{2}$ °W 33.6 feet, scribed $\frac{1}{4}$ S30BT
- A 12" Red Fir bears S62 $\frac{1}{2}$ °W 63.7 feet scribed $\frac{1}{4}$ S31 BT

New BT's have a lower blaze scribed BT with brass washer stamped PLS 1106 nailed flush.
Attached signs 54-3 and 54-4 to all BT's and painted red ring around the trees above the upper blaze

Used steel tape and magnetic compass with 19 $\frac{1}{2}$ ° east declination . Measured to center of Bts.
See map of survey


This corner set October 23, 1979

- Witnesses:
- D. Kaufman, PLS
 - D. Bartleson
 - B. English
 - C. Kelly

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

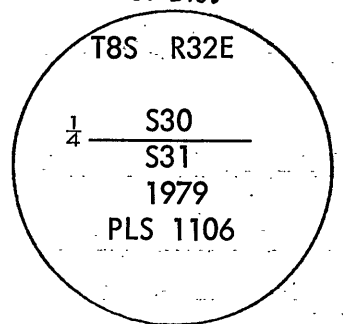

Office of County Surveyor County of Grant
 State of Oregon, I hereby certify that the within Instrument was filed in this office
 for record on the 9 day of Jan 1980
Robert D. Bigart by _____
 (COUNTY OFFICIAL) (DEPUTY)