


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-5

History of original corner establishment:

Herman D. Gradom under G.L.O. Contract No. 416, dated Aug. 19, 1881, set a basalt stone 14"x 12"x 6", 9" in the ground. Stone was marked with 5 notches on the east and 1 notch on the west edge. He raised a stone mound alongside.

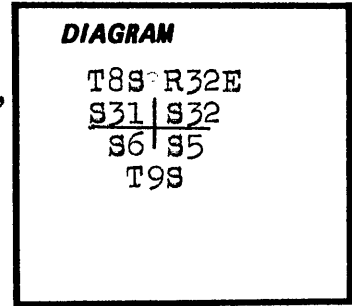

Description of corner evidence found:

I found a stone 14"x 11"x 6" lying loose in a mound of stone. No marks were evident on the stone.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the original stone I set a 2 1/2"x 30" alum. pipe with a 2 1/2" alum. cap marked:
 Monument is 19" in ground and surrounded by a mound of stone. Original stone buried alongside.
 From the corner:

T8S R32E
 S31 | S32
 S6 | S5
 T9S
 PLS 1832
 1991

A Juniper, 15" dia., S26 1/4°W, 186.0 ft.;
 marked: T9S R32E S6 BT

5/8"x 30" iron pin (rebar) driven 23" in ground, N56 1/4°W, 21.9 ft.;
 with 2" alum. cap marked:

T8S R32E
 S31 RM
 21.9 →
 PLS 1832
 1991

5/8"x 30" iron pin (rebar) driven 23" in ground,
 N25 1/4°E, 25.2 ft.; with 1 1/2" yellow plastic cap
 marked: PLS 1832

5/8"x 30" iron pin (rebar) driven 20" in ground,
 N78°E, 47.0 ft.; with 2" alum. cap marked:

T8S R32E
 S32 RM
 47.0 →
 PLS 1832
 1991

BT has blaze and a 6" band painted red, BT tag,
 "Land Survey Monument" sign and alum. "PLS 1832"
 washer nailed to the bottom of the blaze. There is
 a 6' steel fence post with a "Land Survey Monument"
 sign within 5' of the corner.

Measured to center of BT using steel tape and staff compass. Magnetic declination set at 19°E.

Sep. 19, 1991

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 12 day of Nov, 1991
Robert O. Bager by _____
 (COUNTY OFFICIAL) (DEPUTY)

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

OREGON
 JULY 13, 1979
 FAYETTE S. MUNRO
 1832