


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-9

History of original corner establishment:

Herman D. Graddon under G.L.O. Contract No. 416, dated Aug. 19, 1881, set a basalt stone 16"x 12"x 5", marked with 4 notches on the east and 2 notches on the west edge..

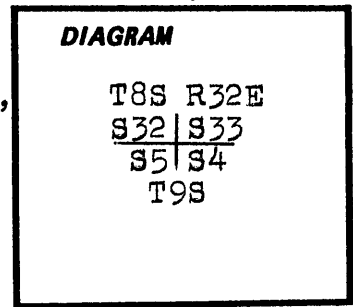

Description of corner evidence found:

I found a stone 16"x 11"x 5" in a mound of stone.. No marks were evident.

Description of monument and accessories I established to perpetuate the

original location of this corner:

In place of the stone I set a 2 1/2"x 30" alum. pipe with a 2 1/2" alum. cap marked; Monument is 15" in ground and surrounded by a mound of stone; original stone buried alongside.. From the corner:

T8S R32E
S32 S33
S5 S4
T9S
PLS 1832
1991

- A Ponderosa Pine, 42" dia., N74°E, 181.7 ft.; marked: T8S R32E S33 BT
- A Ponderosa Pine, 31" dia., S78°E, 203.6 ft.; marked: T9S R32E S4 BT
- A Ponderosa Pine, 16" dia., S5°W, 263.3 ft.; marked: T9S R32E S5 BT
- 5/8"x 30" iron pin (rebar) driven 14" in ground and surrounded by a mound of stone, N36°W, 35.3 ft.; with 1 1/4" yellow plastic cap marked: PLS 1832

BTs have blaze and a 6" band painted red, BT tags, "Land Survey Monument" signs and alum. "PLS 1832" washers nailed to the bottom of the blaze. There is a 6' steel fence post with a "Land Survey Monument" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 19°E.

Sep. 24, 1991

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 12 day of Nov, 1991
Robert O. Duggett by _____
 (COUNTY OFFICIAL) (DEPUTY)

See MOS #1192