


CORNER NO.	MONUMENT	ACCESSORIES
①	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE.	FD. ORIGINAL BT: 22" LARCH BEARS S62°E 24.4 FT. SCRIBED BTS: 8" D. FIR BEARS S10°E 6.6 FT, SCRIBED T9S R35E S23 BT; 8" LARCH BEARS S43°W 16.7 FT, SCRIBED T9S R35E S22 BT; 8" W. FIR BEARS N47°W 28.0 FT, SCRIBED T9S R35E S15 BT; 15" W. FIR BEARS N82°E 39.7 FT, SCRIBED T9S R35E S14 BT.
②	FD. 15" X 12" X 6" STONE. SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	FD. ORIGINAL BTS: 12" LARCH BEARS N20°W 4.6 FT; 11" LP PINE WINDFALL BEARS S48°W 4.6 FT. SCRIBED BTS: 16" LARCH BEARS S67°W 19.0 FT, SCRIBED 1/4 S23 BT; 10" LARCH BEARS N39°W 17.3 FT, SCRIBED 1/4 S14 BT.
③	FD. 2 1/2" BRASS CAP IN 1 1/2" IRON PIPE SET BY WILLIAM HANLEY, ORLS 1639.	FD. ORIGINAL BT: 24" SPRUCE (DOWN) BEARS S17°E 16.5 FT. FD. HANLEY BTS: 21" SPRUCE BEARS S1°E 46.7 FT; 10" LP PINE BEARS S58°W 44.5 FT; 7" LP PINE BEARS N11°W 30.7 FT.
④	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 11" LARCH BEARS S82°W 40.0 FT, SCRIBED NN 1/64 S23 BT; 8" E. SPRUCE BEARS N39°E 2.7 FT, SCRIBED NN 1/64 S24 BT.
⑤	SET W.C. (2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND) 30.0 FT. NORTH ON LINE.	SCRIBED BTS: 8" W. FIR BEARS N45°W 69.0 FT, SCRIBED X BT; 8" W. FIR BEARS S87°W 92.4 FT, SCRIBED X BT.
⑥	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE.	SCRIBED BTS: 7" LP PINE BEARS N51°W 39.7 FT, SCRIBED SN 1/64 S23 BT; 7" LP PINE BEARS N68°E 36.0 FT, SCRIBED SN 1/64 S24 BT.
⑦	FD. 2 1/2" GI PIPE AT CORNER POSITION (NO RECORDED). SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	FD. ORIGINAL BT: 9" LP PINE (DOWN) BEARS S15°W 9.9 FT. TO ROOT HOLE. FD. 9" D. FIR BEARS N44°30'E 29.7 FT. WITH TAG, NOT TRUE BT. SCRIBED BTS: 9" D. FIR BEARS N44°E 29.9 FT, SCRIBED 1/4 S24 BT; 12" D. FIR BEARS N61°W 29.0 FT, SCRIBED 1/4 S23 BT.
⑧	FD. 3/8" IRON ROD (NO RECORDED) BEARS S42°E 1.73 FT. FROM TRUE CORNER. SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 5" W. FIR BEARS N51°E 34.7 FT, SCRIBED NS 1/64 S24 BT; 14" D. FIR BEARS N74°W 40.8 FT, SCRIBED NS 1/64 S23 BT.
⑨	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE.	SCRIBED BTS: 11" LARCH BEARS S38°W 72.4 FT, SCRIBED S 1/16 S23 BT; 11" W. FIR BEARS N84°E 59.8 FT, SCRIBED S 1/16 S24 BT.
⑩	FD. 4" X 4" POST WITH SCRIBING (NOT ORIGINAL). SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE.	FD. ORIGINAL BTS: 19" W. FIR BEARS N88°E 10.6 FT; 12" LARCH (DEAD) BEARS N82°W 20.5 FT. SCRIBED BTS: 8" D. FIR BEARS N8°W 44.1 FT, SCRIBED T9S R35E S23 BT; 9" D. FIR BEARS N58°E 38.7 FT, SCRIBED T9S R35E S24 BT; 6" W. FIR BEARS S44°E 28.7 FT, SCRIBED T9S R35E S25 BT; 8" W. FIR BEARS S47°W 37.0 FT, SCRIBED T9S R35E S26 BT.
⑪	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE.	SCRIBED BTS: 11" D. FIR BEARS N64°E 13.7 FT, SCRIBED E-W-E 1/256 S23 BT; 15" LARCH BEARS S49°E 17.4 FT, SCRIBED E-W-E 1/256 S26 BT.
⑫	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 6" D. FIR BEARS S70°E 22.5 FT, SCRIBED W-E 1/64 S26 BT; 17" D. FIR BEARS N25°E 44.9 FT, SCRIBED W-E 1/64 S23 BT.
⑬	FD. 2 1/2" IRON PIPE AT CORNER POSITION. SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	FD. ORIGINAL BTS: 19" D. FIR BEARS N5°W 12.5 FT; 16" D. FIR BEARS S62°W 23.8 FT. SCRIBED BTS: 10" LARCH BEARS N2°W 72.0 FT, SCRIBED 1/4 S23 BT; 13" D. FIR BEARS S26°W 30.3 FT, SCRIBED 1/4 S26 BT.
⑭	FD. 2 1/2" ALUM. CAP IN 1" GI PIPE SET BY HAMBLETON.	FD. ORIGINAL BTS: 24" LARCH BEARS N21°E 25.0 FT; 22" FIR BEARS S70°E 22.6 FT; 25" LARCH BEARS N64°W 33.8 FT. SCRIBED BTS: 9" W. FIR BEARS S12°E 50.7 FT, SCRIBED T9S R35E S26 BT; 17" E. SPRUCE BEARS S20°W 37.6 FT, SCRIBED T9S R35E S27 BT.

CORNER NO.	MONUMENT	ACCESSORIES
⑮	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 11" E. SPRUCE BEARS S43°W 6.1 FT, SCRIBED 1/4 S22 BT; 13" E. SPRUCE BEARS S60°E 8.0 FT, SCRIBED 1/4 S23 BT.
⑯	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 15" E. SPRUCE BEARS S63°W 22.4 FT, SCRIBED C 1/4 S23 BT; 11" P. PINE BEARS N20°W 16.3 FT, SCRIBED C 1/4 S23 BT.
⑰	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 18" LARCH BEARS S53°E 22.0 FT, SCRIBED C-W-E 1/64 S23 BT; 16" E. SPRUCE BEARS N31°E 3.0 FT, SCRIBED C-W-E 1/64 S23 BT.
⑱	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 7" P. PINE BEARS N89°E 15.3 FT, SCRIBED SW-NE 1/64 S23 BT; 9" P. PINE BEARS S53°W 34.9 FT, SCRIBED X BT.
⑲	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 7" P. PINE BEARS N89°W 121.1 FT, SCRIBED SE-NE 1/64 S23 BT; 8" D. FIR BEARS N36°W 55.6 FT, SCRIBED SE-NE 1/64 S23 BT.
⑳	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 10" P. PINE BEARS S34°E 8.8 FT, SCRIBED C-E-NE 1/64 S23 BT; 9" P. PINE BEARS N84°W 23.7 FT, SCRIBED X BT.
㉑	SET 2 1/2" BRASS CAP IN 2 1/2" X 30" GI PIPE - ROCK MOUND.	SCRIBED BTS: 16" D. FIR BEARS N50°E 55.7 FT, SCRIBED C-E-W-SE 1/256 S23 BT; 13" W. FIR BEARS S37°E 10.6 FT, SCRIBED C-E-W-SE 1/256 S23 BT.

NOTE: ALL NEW BTS ARE FACED AND MARKED PER BLM MANUAL AND IN ADDITION HAVE A BRASS WASHER MARKED LS 1305 NAILED FLUSH IN LOWER BLAZE. ALL BTS ARE PAINTED WITH 6" RED BAND AND TAGGED WITH APPROPRIATE SIGNS. ALL CAPS ARE STAMPED AS PER BLM MANUAL PLUS THE TOWNSHIP, RANGE, 1982, AND PLS 1305. 6 FT. STEEL POSTS WITH APPROPRIATE SIGNS WERE SET 3 TO 5 FT. FROM ALL CORNERS AS PER CONTRACT. FIELD NOTES ARE IN BOOKS A,B,C,D,L,S AND U, CONTRACT NO. S3-04M3-2-2789.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James W. Prochnau
OREGON
SEPTEMBER 23, 1977
JAMES W. PROCHNAU
1305

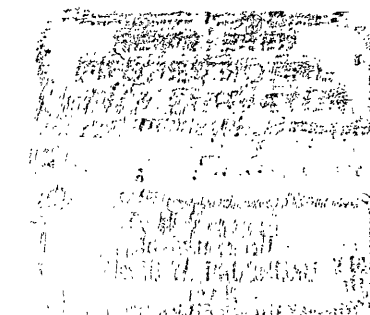

RECEIVED AND
FILED

JAN 2 5 1983

OFFICE OF COUNTY SURVEYOR

Robert D. Beatty
Attest: *Harold J. Hultner*