

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by Herman D. Gradon, under contract No. 499 dated March, 1884.

The original notes state that at the corner:

A 4 in. square by 4 ft. marked post set 24 in. in the ground for the corner, from which:

- A 12 in. dia. Tamarack bears N35°E - 8 lks (5.3 ft.) marked: T7S R35E S23 BT
- A 12 in. dia. Tamarack bears S76°E - 16 lks. (10.6 ft.) marked: T7S R35E S26 BT
- A 10 in. dia. Tamarack bears S73°W - 11 lks (7.3 ft.) marked: T7S R35E S27 BT
- A 7 in. dia. Fir bears N67°W - 21 lks (13.9 ft.) marked: T7S R35E S22 BT

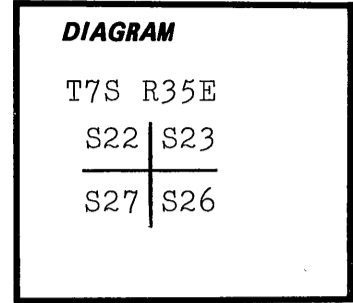

No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

- A 19 in. dia. Tamarack bears N44°E - 8 lks (5.3 ft.) with healed blaze.
- A 14½ in. dia. Tamarack snag bears S72°E - 16 lks (10.6 ft.) with open blaze.
- A 13½ in. dia. Tamarack bears S73°W - 11 lks (7.3 ft.) with healed blaze.

Reset corner by distance-distance intersection from found bearing trees.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set: A 2½ in. X 30 in. aluminum pipe, with a 2½ in. aluminum cap, 26 in. in the ground with a mound of earth to the cap, from which:

- A 12 in. dia. Fir bears S77½°E - 40.5 ft., scribed: T7S R35E S26 BT
- A 11 in. dia. Fir bears S32°W - 40.8 ft. scribed: T7S R35E S27 BT
- A 8½ in. dia. Fir bears N34½°W - 22.7 ft. scribed: T7S R35E S22 BT

Each new bearing tree has a brass washer stamped PLS 1106 nailed to the face of the blaze. Attached signs 54-3 and 54-4 and painted the face of the blaze and a 6 in. red band around each bearing tree.

Set a steel fence post, with 54-4 sign attached, North of the monument.

Used a steel tape and a magnetic staff compass, with 20° East declination. Measured to the center of the bearing trees.

This corner was monumented on September 7, 1983.


Witnessed by: Robert D. English
Aaron C. Hoeft

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Cap marked:

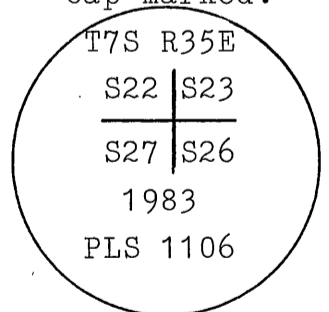

Office of.....County Surveyor..... County of..... Grant
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the...15... day of...OCT... , 1983
Robert D. English by.....
(COUNTY OFFICIAL) (DEPUTY)